

# Session 12: Introduction to MPI (4PY)

October 7<sup>th</sup>, 2022 | Sandra Diaz Pier


Original version of the material by Lena Oden and Wouter Klijn

# Overview

- Introduction
  - Basic concepts
  - mpirun
- Hello world
- Wrapping numpy arrays
- Common Pitfalls

# Introduction

- MPI: de facto standard for parallel programming in HPC systems since 1994 (MPI 1.0)
- Currently at MPI 3.1 different implementation:
  - OpenMPI
  - MPICH
  - Mvapich
  - ....
- Distributed memory systems (process parallel)
- Message-passing
- Goals: performance, scalability, portability
  - Shared memory, sockets, Infiniband...
- Standard is C (C++ bindings deprecated)
- MPI4PY: Layer above in Python

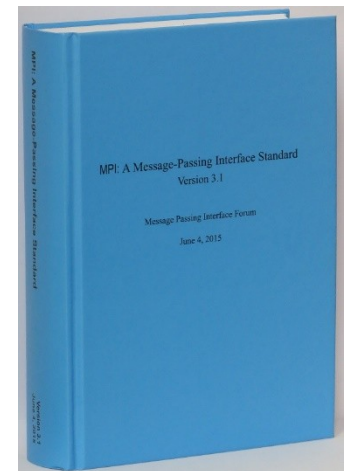

# Getting started

- Requires an MPI Installation + mpi4py
- **Communicator**: The “context” processes use to talk with each other
  - groups processes
  - Separation of concerns
- Process can be in more than one communicator
  - `rank = comm.Get_rank()`
  - `size = comm.Get_size()`
- **MPI\_COMM\_WORLD (MPI.COMM\_WORLD)**
  - Basic communicator, created at start time

# Introduction: mpirun

- MPI programs are started with a specialized runner application
  - Sets up the environment and starts the instances
  - Distributes processes across nodes

```
mpirun -np 2 python hello_world.py <args>
```

mpirun	: MPI runner applications
-np 2	: number of parallel mpi processes to start
python hello_world.py	: Your application
<args>	: Arguments (argv and argc stay the same.)

# Hello world

```
from mpi4py import MPI

# Communicator that contains all mpi processes
comm = MPI.COMM_WORLD

rank = comm.Get_rank()
size = comm.Get_size()
name = MPI.Get_processor_name()

print("Rank {0} out of {1} on {2}".format(
    rank, size, name))
```

```
$ srun -np 2 python3 hello_world.py
Rank 0 out of 2 on ANDREASPC
Rank 1 out of 2 on ANDREASPC
```

# Blocking Point-to-Point

- Simple principle:
  - One process sends a message (comm.send)
  - Another process receives the message (comm.recv)
- Blocking, until **locally** completed
- Tag for matching (Should always be set, if possible)

```
from mpi4py import MPI
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
if rank == 0:
    data = {'a': 7, 'b': 3.14}
    comm.send(data, dest=1, tag=1)
elif rank == 1:
    data = comm.recv(source=0, tag=11)
    print(data)
```

# MPI4Py: *pickle based vs. arrays*

- MPI4Py supports both:
  - generic Python objects
  - buffer-like objects (e.g. numpy)
- Generic objects
  - Data are pickled before transfer
  - Needs time and memory
- Buffer-like objects
  - **S**end(), **R**ecv()
  - Tuple/triple for the data
    - [data, MPI.DOUBLE]
    - [data, count, MPI.DOUBLE]




# Example: Send/Recv with numpy

```
from mpi4py import MPI
import numpy as np
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
if rank is 0:
    data = np.array([1,2,4,5], dtype='int')
    comm.send(data, dest=1, tag=1)
elif rank is 1:
    data = comm.recv(source=0, tag=1)
    print(data)
```

# Example: Send/Recv with numpy

```
from mpi4py import MPI
import numpy as np
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
if rank is 0:
    data = np.array([1,2,4,5], dtype='int')
    comm.Send([data, MPI.INT], dest=1, tag=11)
elif rank is 1:
    data=np.zeros(4, dtype='int')
    comm.Recv([data, MPI.INT], source=0, tag=11)
    print(data)
```

# Performance Comparison

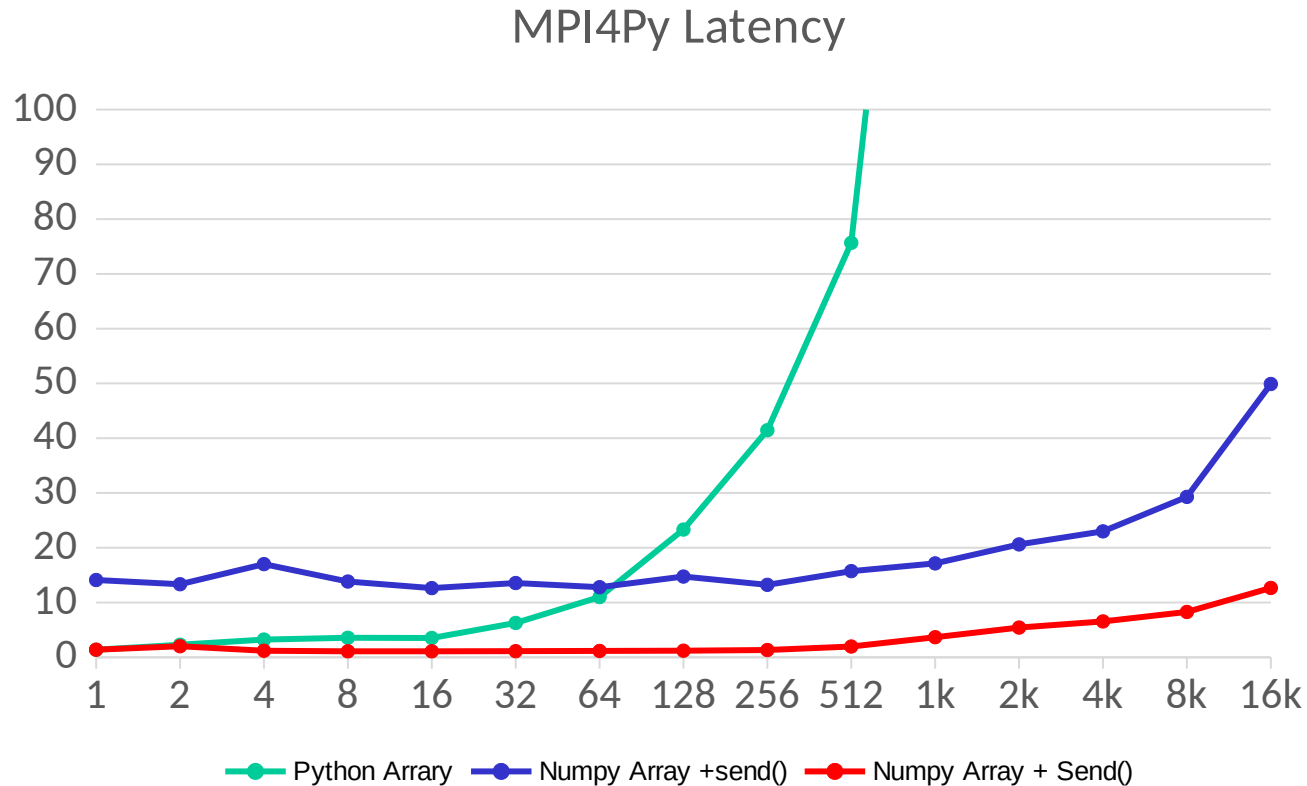

# Non-Blocking Point to Point

- Non-blocking version of Send/Recv
- Start a send/recv operations
- Completed later (wait)
- Used to overlap computation and communication
- Avoiding Deadlocks

```
from mpi4py import MPI
import numpy as np
```

```
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
req = {}
```

```
if rank == 0:
    data = np.array([1,2,4,5], dtype='int')
    req[0]= comm.Isend([data, MPI.INT], dest=1, tag=11)
elif rank == 1:
    data=np.zeros(4, dtype='int')
    req[0] = comm.Irecv([data, MPI.INT],source=0, tag=11)
    req[0].wait()
    #MPI.Request.waitall(req)
```

# Exercise 1: Deadlocks

```
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
size = comm.Get_size()
#modify this function so we don't have a deadlock
send_data1 = np.array([1,2,4,5], dtype='int')
send_data2 = np.array([5,7,8,9], dtype='int')
recv_data1 = np.zeros(4, dtype='int')
recv_data2 = np.zeros(4, dtype='int')
next = (rank + 1)%size
prev = (size + rank -1) % size
comm.Send([send_data1, MPI.INT], dest=next, tag=11)
comm.Recv([recv_data2, MPI.INT], source=next, tag=12)
comm.Send([send_data2, MPI.INT], dest=prev, tag=12)
comm.Recv([recv_data1, MPI.INT], source=prev, tag=11)
```

# Caution





- Send/Recv are only locally blocking
- Send may return, before the other process has received the data
  - Depends on the Message size and the MPI-implementation
- Using non-blocking communication does NOT necessarily mean that communication is handled in the background
  - May require “poking” of the MPI Progress Engine
  - Depends on MPI implementation and message size
  - Req.test()
- Wait is usually busy wait (in HPC, we prefer our threads to sleep)

# Collective Operations

- A communication call to collective send/recv messages in a communicator
  - Barrier
  - Bcast
  - Scatter
  - Gather
  - Allgather
  - Reduce/Allreduce
- Forces a synchronization between Processes
  - Can also be a reason for slow-down
  - Usually, a busy waiting model (HPC)

# Barrier

```
from mpi4py import MPI
import numpy as np
comm = MPI.COMM_WORLD
comm.Barrier()
#comm.barrier()
```

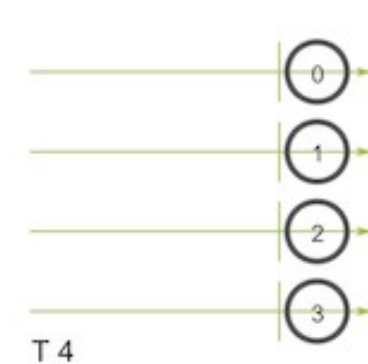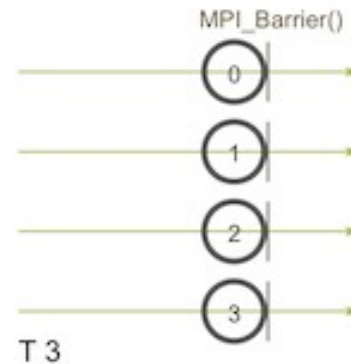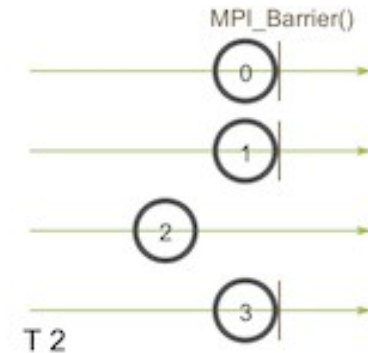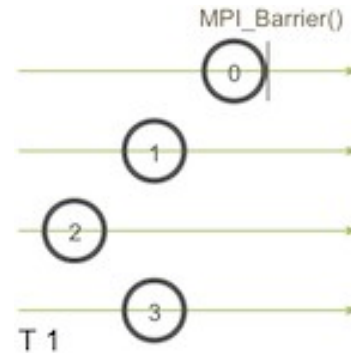



# Bcast and Scatter

```
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
if rank is 0:
    data = np.array([2,2,3,4], dtype='int')
else:
    data = np.zeros(1, dtype='int')
```

```
comm.Bcast([data,MPI.INT], root=0)
print("bcast", rank, data)
if rank is 0:
```


```
    comm.Scatter([data, MPI.INT],
                 - [data,MPI.INT],
                 - root=0)
```

```
else:
```

```
    comm.Scatter(None,
                 - [data,MPI.INT],
                 - root=0)
```


```
print("scatter", rank, data)
```

MPI\_Bcast

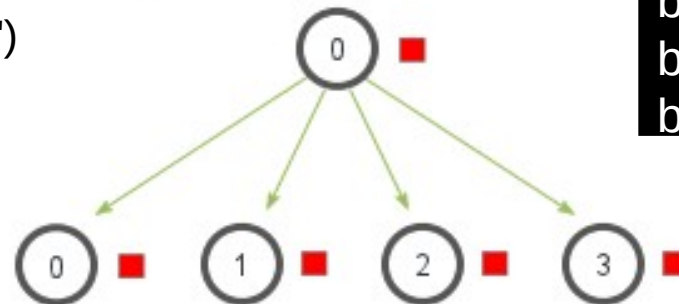

```
bcast 0 [2 2 3 4]
bcast 1 [2 2 3 4]
bcast 3 [2 2 3 4]
bcast 2 [2 2 3 4]
```

MPI\_Scatter

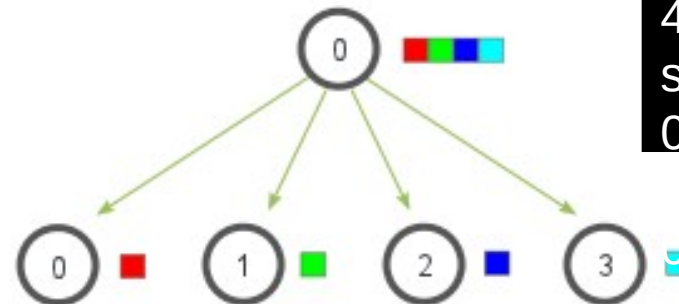


```
scatter 0 [2 2 3
4]
scatter 1 [2 0 0
0]
```

# Gather and Allgather


```
comm = MPI.COMM_WORLD
size = comm.Get_size()
rank = comm.Get_rank()
```

```
data = (rank+1)**2
data = comm.gather(data, root=0)

print(rank, data)
```

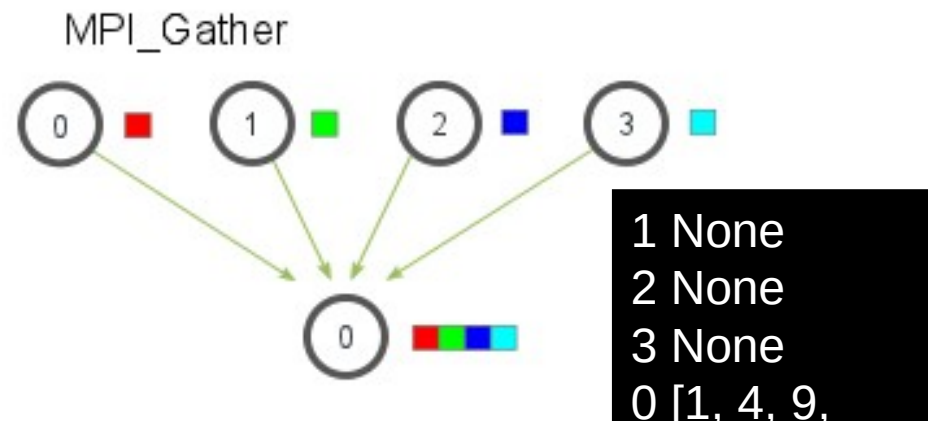

```
ata = np.array(rank, dtype='int')
gather = np.zeros(4, dtype='int')
comm.Allgather([data, MPI.INT],
               [gather, MPI.INT])
print(rank, gather)
```

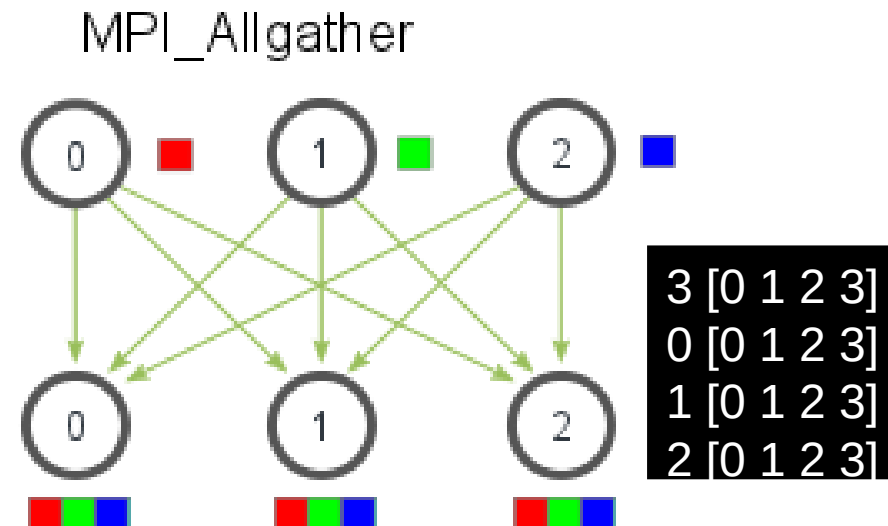


# Reduce/Allreduce


```
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
data = np.array(rank, dtype='int')
result = np.zeros(1, dtype='int')
comm.Reduce([data, MPI.DOUBLE],
            [result, MPI.DOUBLE],
            op=MPI.SUM, root=0)
print("reduce", rank, result)
```

```
comm.Allreduce([data, MPI.DOUBLE],
               [result,
                MPI.DOUBLE],
               op=MPI.SUM)
print("allreduce", rank, result)
```

MPI\_Reduce

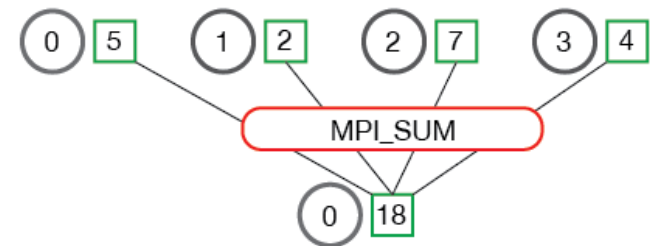

MPI\_Allreduce

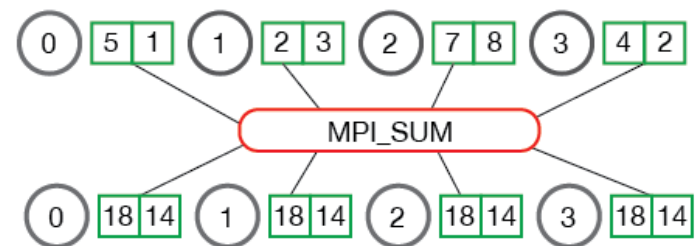

# Reduce/Allreduce

```
comm = MPI.COMM_WORLD
rank = comm.Get_rank()
data = np.array(rank, dtype='int')
result = np.zeros(1, dtype='int')
comm.Reduce([data, MPI.DOUBLE],
            [result, MPI.DOUBLE],
            op=MPI.SUM, root=0)
print("reduce", rank, result)

comm.Allreduce([data, MPI.DOUBLE],
               [result,
                MPI.DOUBLE],
               op=MPI.SUM)
print("allreduce", rank, result)
```

```
reduce 1 [0]
reduce 3 [0]
reduce 2 [0]
reduce 0 [6]
allreduce 2 [6]
allreduce 3 [6]
allreduce 1 [6]
allreduce 0 [6]
```

# Exercise 2: Computing Pi in Parallel

If rank is 0

```
N = np.array(10000, 'i')
```

```
#Distribute N Across all nodes
```

```
start = time.time()
```

```
h = 1.0 / N; s = 0.0
```

```
for i in range(rank, N, size):
```

```
    x = h * (i + 0.5)
```

```
    s += 4.0 / (1.0 + x**2)
```

```
PI = np.array(s * h, dtype='d')
```

```
#collect result with the reduce function
```

```
end = time.time()
```

```
if rank is 0:
```

```
    print ("I get for PI {0}").format(PI_ALL)
```

```
    print("I needed {0} seconds").format(end-start)
```

# Further reading and resources used

[https://en.wikipedia.org/wiki/Message\\_Passing\\_Interface](https://en.wikipedia.org/wiki/Message_Passing_Interface)

<https://www.nesi.org.nz/sites/default/files/mpi-in-python.pdf>

# Thank you for your attention

Further reading and resources used

[https://en.wikipedia.org/wiki/Message\\_Passing\\_Interface](https://en.wikipedia.org/wiki/Message_Passing_Interface)

<https://www.nesi.org.nz/sites/default/files/mpi-in-python.pdf>